



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets



CANCELLATION



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00201527.9

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN  
THE HAGUE, 10/04/01  
LA HAYE, LE

**THIS PAGE BLANK (USPTO)**



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.:  
Demande n°: 00201527.9

Anmeldetag:  
Date of filing: 28/04/00 ✓  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
**Mannesmann VDO Aktiengesellschaft**  
**60388 Frankfurt am Main**  
**GERMANY**

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:  
**Antenna diversity receiver**

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

**H04B7/08**

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:

**THIS PAGE BLANK (USPTO)**

28. 04. 2000

## Antenna diversity receiver

(75)

The invention relates to an antenna diversity receiver comprising antenna selective switching means for coupling  
5 one of a plurality of antennas to an RF receiver input, as well as a multipath detector for controlling said antenna selective switching means. Such a receiver may use Philips' IC TEA 6101 and is described in Philips' application datasheets of this IC.

10

The reception of a wanted RF broadcast transmitter signal may be disturbed or otherwise deteriorated by various phenomena, such as multipath reception and/or adjacent channel interferences. In general, multipath reception is  
15 caused by signal reflections at and/or against environmental physical obstacles, such as mountains, trees, buildings, fences and the like. Due to such signal reflections an RF broadcast signal may arrive at a certain reception location through various different signal paths,  
20 i.e. in various different amplitude and phase conditions. The summation of these multipath signals at the antenna of the receiver results in unpredictable signal amplitude and/or phase distortions, most often effectuating in part or complete cancellation of the useful RF reception signal.  
25 These signal cancellations, hereinafter also being referred to as signal dips, strongly depend on the RF carrier frequency of the received RF broadcasting signal and on the location of reception.

30 Said signal dips severely deteriorate the wanted RF broadcasting signal and therewith also the overall signal reception quality. However, a relatively small shift in the

position of the antenna could already suffice to strongly improve said signal reception quality. This solution is used in socalled antenna diversity receivers to avoid reception of multipath distorted RF signals in particular  
5 with mobile FM receivers. Such antenna diversity receivers are provided with two or more mutually apart placed antennas being coupled to an RF input of a receiver. Only that antenna is actually connected to the RF receiver input, having best local receiving conditions with respect  
10 to the other antenna(s). This antenna, hereinafter also being referred to as actual antenna, will be effective in the reception and supply of the wanted RF broadcasting signal to the receiver as long as the multipath distortion at this actual antenna remains smaller than a certain  
15 predetermined multipath threshold level. As soon as the received multipath distortion exceeds said certain predetermined multipath threshold level, a change over in the RF signal supply to the receiver from this actual antenna to another antenna being then positioned at a  
20 location with better receiving conditions, is initiated. The receiver is therewith continuously optimised for minimum multipath reception.

However, inherent to the antenna diversity feature are the  
25 short interruptions in the RF signal supply to the receiver during such antenna change over or switching action. Due to the delay between the occurrence of an actual multipath caused signal dip and the detection thereof, said RF signal interruptions may be detected as being caused by multipath  
30 effects, and may therewith initiate a subsequent false antenna switching action. Such false antenna switching action may in its turn be detected as a multipath

originated signal dip again, initiating a further false antenna switching action, and so on and so forth, with a kind of oscillating effect as a result. To reduce the risk of oscillating antenna switching actions, the above known  
5 antenna diversity receivers using Philips' IC TEA 6101 are provided with means to disable any switching action following a preceding switching action within a certain predetermined fixed time period.

10 This known measure however, is not effective in receivers with dynamic IF selectivity, such as receivers with adjacent channel suppression. As mentioned above, adjacent channel interferences are another important source of signal distortion and are usually caused by FM radio  
15 broadcast signals modulated on a carrier positioned in frequency adjacent to the carrier frequency of a wanted FM radio broadcast signal. Due to e.g. peak values in the FM modulation signal, these adjacent channel FM radio signals may temporarily exceed the allocated channel bandwidth  
20 therewith breaking through into the frequency range of said wanted FM radio broadcast signal. In receiver with adjacent channel suppression such adjacent channel interferences are being suppressed by varying the bandwidth of the variable bandwidth intermediate frequency (IF) selective means -  
25 hereinafter also being referred to as IF bandwidth - dependent on the deviation of the adjacent channel signal within the frequency range of the wanted FM radio broadcast signal. The larger said deviation, the smaller the bandwidth of the variable bandwidth intermediate frequency  
30 (IF) selective means. The so dynamically varying IF selectivity therewith effectuates a suppression of the adjacent channel interferences.

It is an object of the invention to combine in a receiver the benefits of the antenna diversity feature with those of the dynamic IF selectivity feature while preventing  
5 unwanted effects to occur.

It is another object of the invention to improve the overall performance of antenna diversity receivers.

10 An antenna diversity receiver comprising antenna selective switching means for coupling one of a plurality of antennas to an RF receiver input, as well as a multipath detector for controlling said antenna selective switching means is therefore characterised by switching disabling means for  
15 automatically disabling said switching means when the signal delay between the occurrence of multipath in the RF reception signal and said switching exceeds a predetermined critical signal delay value.

20 The invention is based on the recognition that in an antenna diversity receiver the delay between the actual occurrence of a multipath caused signal dip and the detection thereof is determined by the receiver's IF selectivity. In a receiver with dynamic IF selectivity, the  
25 IF bandwidth is variable, therewith causing said delay to vary too: the smaller the IF bandwidth the longer the delay and vice versa. However, the longer the delay, the greater the risk of oscillating false antenna switching actions. By introducing said delay as new parameter for disabling  
30 antenna switching actions in accordance with the invention, any antenna switching action is being disabled when and for the time said delay exceeds said predetermined critical



value. This allows for a combination of the features of antenna diversity and dynamic IF selectivity, while preventing antenna switching actions from oscillating.

- 5 Preferably, such antenna diversity receiver is characterised by an adjacent channel detector coupled to a bandwidth variable intermediate frequency (IF) circuit, said predetermined critical signal delay value defining a critical bandwidth for said bandwidth variable IF circuit,  
10 said switching means being automatically disabled when the bandwidth of said bandwidth variable IF circuit is smaller than said critical bandwidth.

- This measure is based on the above correspondence between  
15 the IF bandwidth on the one hand and said delay between the actual occurrence of a multipath caused signal dip and the detection thereof on the other hand, the bandwidth of the bandwidth variable intermediate frequency (IF) circuit - also being referred to as IF selective means - being  
20 accurately reflected in the output signal of the adjacent channel detector. This allows for a simple implementation of the invention.

- A further preferred embodiment of the antenna diversity  
25 receiver according to the invention is characterised by a threshold circuit being coupled between an output of the adjacent channel detector and a control input of the switching disabling means for comparing the output signal of the adjacent channel detector with a threshold value  
30 corresponding to said critical bandwidth and for supplying a switching disabling control signal to the switching disabling means when said output signal of the adjacent

channel detector effectuates a bandwidth smaller than said critical bandwidth.

With a simple adjustment of the threshold voltage, the  
5 critical bandwidth can be set at a value preventing the antenna switching actions from oscillating on the one hand and providing an effective adjacent channel suppression on the other hand.

10 An antenna diversity receiver, which is provided with a fixed timer circuit introducing a fixed switching disabling period following each antenna switching action in accordance with the invention is preferably characterised by said bandwidth variable intermediate frequency (IF)  
15 circuit effecting a signal delay at said critical bandwidth corresponding to said fixed switching disabling period.

Such a fixed timer circuit is included in the above Philips' IC TEA 6101 and may well be combined with the  
20 antenna switching disabling functionality initiated by the above switching disabling control signal. The use of the fixed switching disabling period as a reference for the determination of the critical bandwidth avoids the occurrence of antenna switching oscillations throughout the  
25 complete bandwidth control range of the bandwidth variable intermediate frequency (IF) circuit.

In practise the fixed switching disabling period following each antenna switching action in said Philips' IC TEA 6101  
30 is 20 usec., defining said critical bandwidth to be substantially within the range between 40 and 50 KHz.

Another preferred embodiment of antenna diversity receiver according to the invention, providing for a simple combination of both the adjacent channel suppression feature with the antenna diversity feature is characterised  
5 in that the adjacent channel detector is provided with a multiplex input being coupled to an output of the demodulator for detecting adjacent channel reception at the occurrence of both an amplitude variation in the IF signal level as well as distortion components in the demodulator  
10 output signal.

In yet another preferred embodiment, the plurality of antennas comprises an antenna for receiving radio broadcast RF signals as well as an antenna for receiving  
15 telecommunication RF signals.

These and further aspects and advantages of the invention will be discussed more in detail hereinafter with reference to the disclosure of preferred embodiments, and in particular  
20 with reference to the appended single Figure showing a preferred embodiment of a receiver according to the invention.

The single Figure shows an antenna diversity FM receiver  
25 comprising first to fourth antennas 2, 4, 6, 8 coupled through antenna selective switching means 10 to an RF receiver input circuit 12, subsequently followed by a mixer device 14 being supplied with a tunable local oscillator signal from an oscillator circuit 16, variable bandwidth  
30 intermediate frequency (IF) selective means 18 - hereinafter also being referred to as selective IF circuit -, an IF amplifier 20, an FM demodulator 22 and baseband

modulation signal processing means 24 being coupled to stereo left and stereo right signal reproducing means 26, respectively 28.

5 The signal processing in the antenna diversity receiver described sofar is on itself known: an RF broadcasting signal received at one of the first to fourth antennas 2, 4, 6, 8 - in the embodiment shown: the third antenna 6 (hereinafter also referred to as actual antenna) - is  
10 supplied via the antenna selective switching means 10 and an RF receiver input terminal to the RF receiver input circuit 12 for a broadband selection and amplification thereof. The output signal of the RF receiver input circuit 12 is thereafter mixed in the mixer device 14 with the  
15 tunable local oscillator signal for a first demodulation of a wanted RF broadcast signal into an intermediate frequency (IF) signal. This IF signal is filtered in the selective IF circuit 18, subsequently amplified in the IF amplifier 20 and demodulated in the FM demodulator 22 into a baseband  
20 modulation signal comprising a stereo multiplex (MPX) signal. The MPX signal is further processed in the processing means 24 to obtain stereo left and stereo right signals to be converted into acoustic signals in said stereo left and stereo right signal reproducing means 26,  
25 respectively 27.

The antenna diversity receiver also comprises a multipath detector 30 for a detection of multipath distorsion in the received RF signal. The detection of multipath distorsion  
30 is based on two criteria: the occurrence of a (fast) amplitude dip in the level of the IF signal and the occurrence of distortion components occurring within the

frequency range of the baseband modulation signal above the frequency spectrum of the MPX signal. First and second input terminals of the multipath detector 30 are therefore coupled respectively to an output of the selective IF circuit 18 and to an output of the FM demodulator 22. If an IF signal dip is detected to occur simultaneously with distortion components within the frequency range of the baseband modulation signal, then the multipath detector 30 supplies a switching control signal to a switching control signal input terminal 31 of an antenna switching control device 32. This causes the antenna selective switching means 10 to change over reception from antenna 6 being the actual antenna up to this switching action, to another antenna, having better receiving conditions than the antenna 6, e.g. antenna 8 (the connection to the RF receiver input circuit 12 not being shown). The next detection of a multipath caused signal dip will initiate in same manner again a subsequent antenna switching action. In receivers using Philips' IC TEA 6101 the antenna switching control device 32 comprises switching disabling means 33 preventing any antenna switching action from being followed by a subsequent antenna switching action within a fixed time period of 20 usec., hereinafter referred to as fixed switching immunity periods. The antenna switching disabling means 33 comprises a timer circuit (not shown) using a counter, which is set to start counting monotonously up or down at the occurrence of each switching control signal and stops counting after said fixed time period of 20 usec, providing immunity from switching control signals during counting. This prevents switching actions during these fixed switching immunity periods from occurring.

The antenna diversity receiver is provided with an adjacent channel detector 38 functioning as bandwidth control means having an input being coupled to an output of the FM demodulator 22 and an output being coupled to a bandwidth control input of the selective IF circuit 18 for varying the bandwidth thereof dependent on adjacent channel interferences, such that the bandwidth of the selective IF circuit 18 is smaller, the more the adjacent channel signal is overlapping or threspassing the frequency area of the wanted RF signal. The interferences caused by such adjacent channel signal are therewith reduced. For a more detailed description of the functioning of the adjacent channel feature in suppressing adjacent channel interferences, reference is made to US patent 4 907 293.

In addition to the fixed switching immunity periods the receiver according to the invention is also provided with an immunity for switching control signals from the multipath detector 30 when and for the time, the bandwidth of the selective IF circuit 18 is smaller than a certain critical bandwidth value. To avoid switching actions from oscillating at any bandwidth of the selective IF circuit 18 within its entire bandwidth variation range, the length of the fixed switching immunity periods following each antenna switching action provided by the timer circuit is used to determine the critical bandwidth value, such that said bandwidth variable intermediate frequency (IF) circuit will effect a signal delay at said critical bandwidth corresponding to said fixed switching disabling period. At a length of the fixed switching immunity periods of 20 usec. said critical bandwidth value, also being referred to as predetermined threshold value of the IF selectivity

bandwidth, will be substantially within the range between 40 and 50 KHz.

Therefore, the receiver shown comprises a threshold circuit  
5 36 being coupled between an output of the adjacent channel  
detector 38 and a control input 35 of the antenna switching  
disabling means 33 for comparing the output signal of the  
adjacent channel detector 38 with a threshold value  
corresponding to said critical bandwidth value and for  
10 supplying a switching disabling control signal to the  
antenna switching disabling means 33, when said output  
signal of the adjacent channel detector 38 effectuates a  
bandwidth smaller than said critical bandwidth value. The  
threshold value is set with a well chosen predetermined  
15 threshold voltage  $V_{th}$  supplied from a threshold voltage  
input terminal 34 to the threshold circuit 36.

The person skilled in the art will recognize alternative  
embodiments within the ambit of the present invention, the  
20 scope of which has justfully been determined by the appended  
Claims hereinafter. For example, the plurality of antennas  
may comprise an antenna for receiving radio broadcast RF  
signals as well as an antenna for receiving  
telecommunication RF signals.





28. 04. 2000

## Claims:

(75)

1. Antenna diversity receiver comprising antenna selective switching means for coupling one of a  
5 plurality of antennas to an RF receiver input, as well as a multipath detector for controlling said antenna selective switching means characterised by switching disabling means for automatically disabling said switching means when the signal delay between the  
10 occurrence of multipath in the RF reception signal and said switching exceeds a predetermined critical signal delay value.
2. Antenna diversity receiver according to claim 1,  
15 characterised by an adjacent channel detector coupled to a bandwidth variable intermediate frequency (IF) circuit, said predetermined critical signal delay value defining a critical bandwidth for said bandwidth variable IF circuit, said switching means being  
20 automatically disabled when the bandwidth of said bandwidth variable IF circuit is smaller than said critical bandwidth.
3. Antenna diversity receiver according to claim 2,  
25 characterised by a threshold circuit being coupled between an output of the adjacent channel detector and a control input of the switching disabling means for comparing the output signal of the adjacent channel detector with a threshold value corresponding to said  
30 critical bandwidth and for supplying a switching disabling control signal to the switching disabling means when said output signal of the adjacent channel

detector effectuates a bandwidth smaller than said threshold bandwidth value.

4. Antenna diversity receiver according to claim 2 or 3,  
5 which is provided with a fixed timer circuit  
introducing a fixed switching disabling period  
following each antenna switching action in accordance  
with the invention characterised by said bandwidth  
variable intermediate frequency (IF) circuit effecting  
10 a signal delay at said critical bandwidth  
corresponding to said fixed switching disabling  
period.
5. Antenna diversity receiver according to one of claims  
15 2 to 4, characterised in that said predetermined  
threshold value of the IF selectivity bandwidth is  
substantially within the range between 40 and 50 KHz.
6. Antenna diversity receiver according to one of claims  
20 2 to 5, characterised in that the adjacent channel  
detector is provided with a multiplex input being  
respectively coupled to an output of the demodulator  
for detecting adjacent channel reception at the  
occurrence of both an amplitude variation in the IF  
25 signal level as well as distortion components in the  
demodulator output signal.
7. Antenna diversity receiver according to one of claims  
30 1 to 6, characterised in that the plurality of  
antennas comprises an antenna for receiving radio  
broadcast RF signals as well as an antenna for  
receiving telecommunication RF signals.

28. 04. 2000

(75)

## Abstract

- 5 Antenna diversity receiver comprising a multipath detector for controlling antenna selective switching means for coupling one of a plurality of antennas to an RF receiver input. To allow such receiver to be provided with a suppression of adjacent channel interferences without
- 10 unwanted side effects, switching disabling means are used for automatically disabling said switching means when the signal delay between the occurrence of multipath in the RF reception signal and said switching exceeds a predetermined critical signal delay value.


**THIS PAGE BLANK (USPTO)**

EPO - DG 1

28. 04. 2000

75

1 / 1

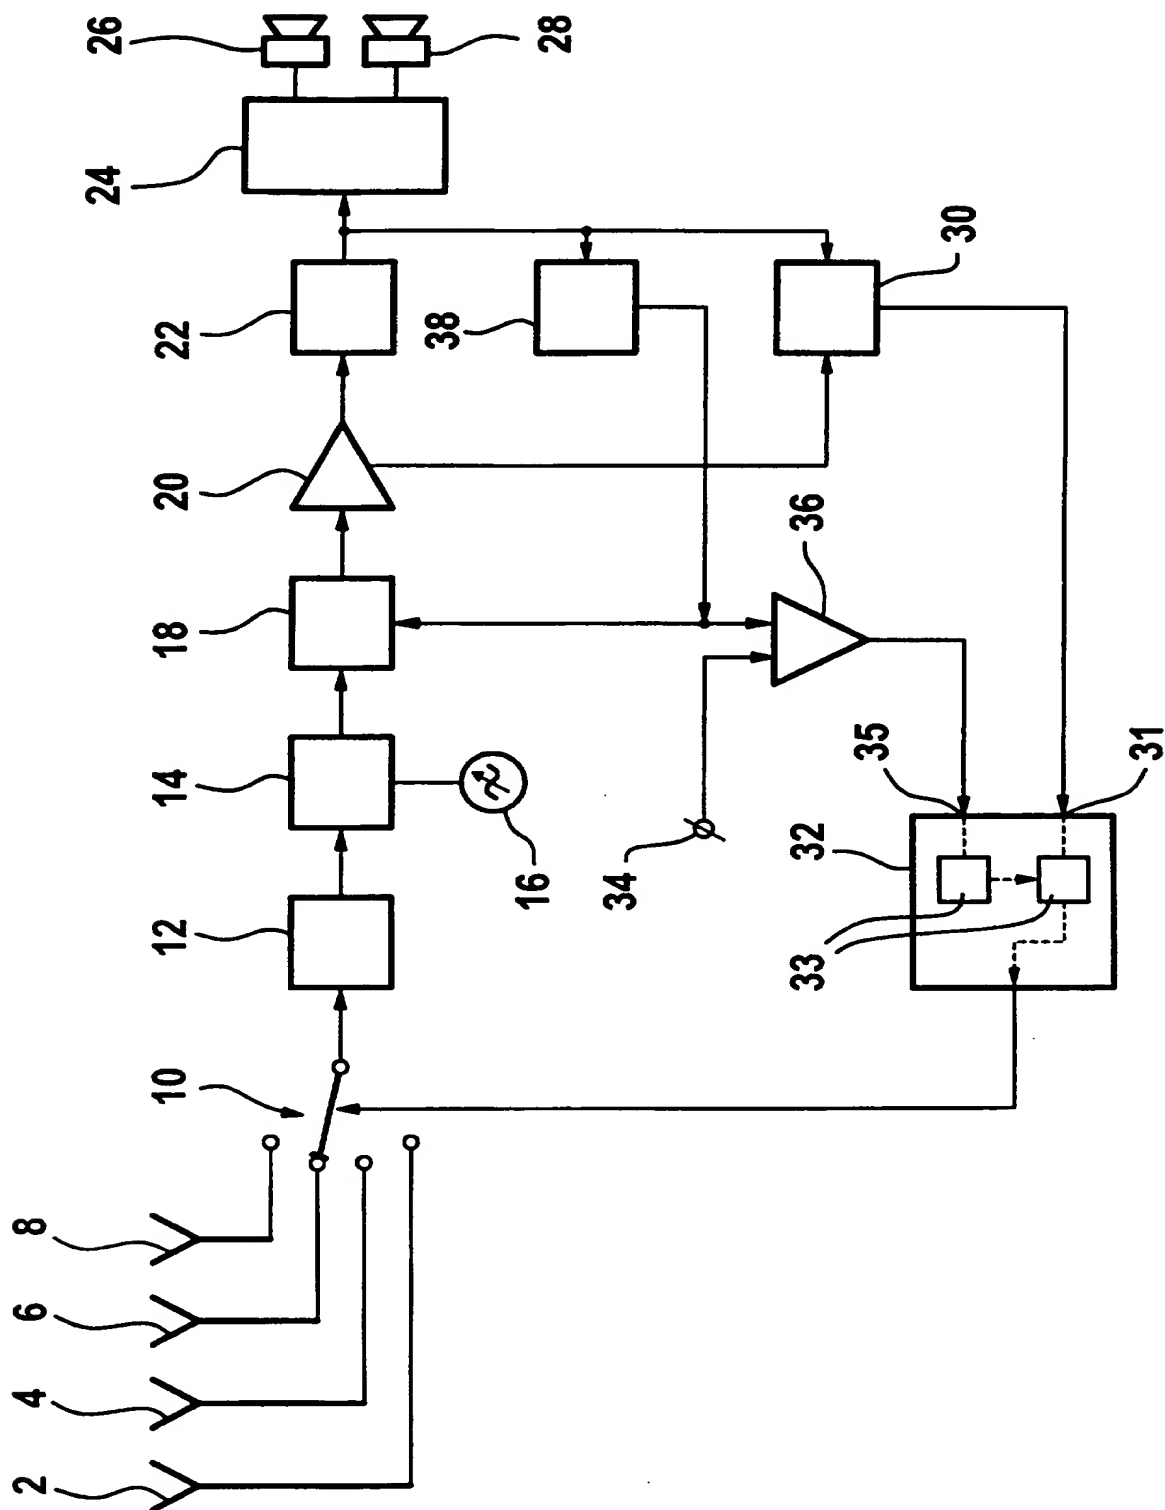

**THIS PAGE BLANK (USPTO)**